


# TW = Trunnion 3 way



- Full and reduce bore.
- Valve according to BS 5351– ASME B16.34 - ASME VIII Div.1.
- Automatic self relieving seat design on inlet way and double piston effect on outlet ways.
- Soft and metal seated version.
- Anti blow-out stem design system.
- Face to face according to manufacturer standard or customer data sheet.
- Antistatic device according to BS 5351.
- Flanges according to ASME B16.5.
- BW ends in acc. to ASME B16.25.
- SW ends in acc. with ASME B16.11.
- Fire safe according to BS-6755 pt.2°/API6FA

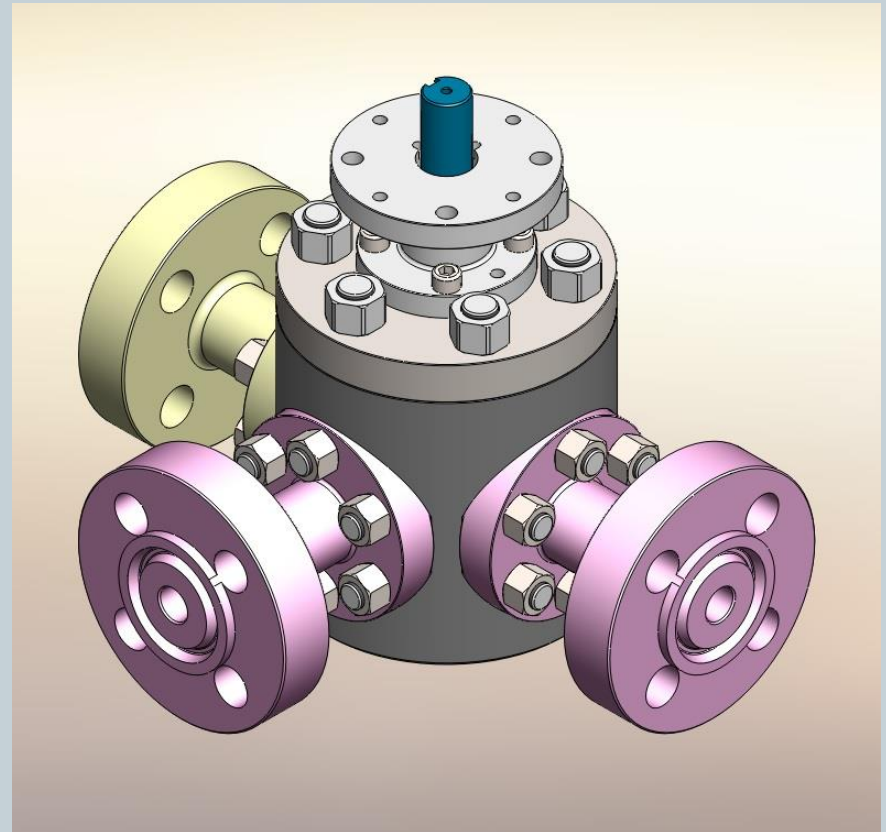

EMMECI Valves can be furnish with manual operator : lever/hand wheel/gearbox/  
bare stem or complete with actuated operator.